



## #154 Light

FOR USE WITH GULF COAST FANS MODELS ONLY

### READ AND SAVE THESE INSTRUCTIONS

**!! TO AVOID RISK OF FIRE OR ELECTRIC SHOCK, TURN THE POWER SUPPLY OFF AT THE SOURCE!!**

**ALL ELECTRICAL CONNECTIONS MUST BE IN ACCORDANCE WITH LOCAL AND NATIONAL ELECTRICAL CODES!**

Before starting installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse block. Turning power off using the fan switch (speed control/on, off) is not sufficient to prevent electrical shock.


**CAUTION:** To reduce the risk of fire and electric shock, this light kit should only be used with Gulf Coast Fans/Dan's Fan City ceiling fan models.

1. Remove the switch cup from the fan (if not already removed) by removing the three screws from around the upper portion of the switch cup. Disengage the wire connector.

2. Remove the center screw/finial from the switch cup.


3. Remove all parts from the light kit package.

4. Feed the light kit's wires through the center hole of the switch cup and thread the light body onto the switch cup until snug. See Fig 1.

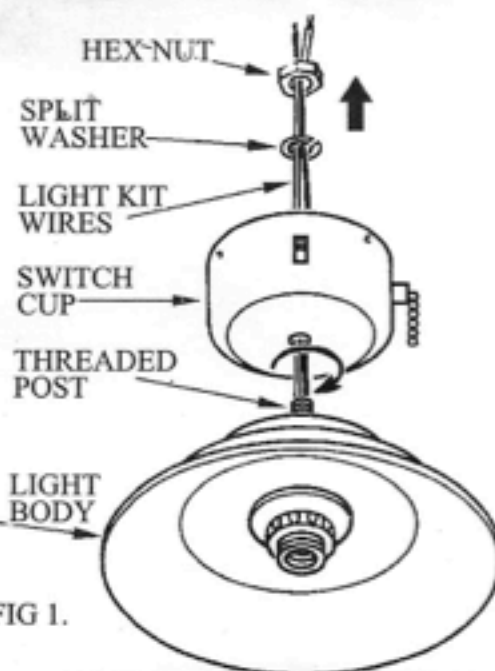

5. Feed the light kit's wires through the split washer and hex nut. Thread these onto the light kit post now inside the switch cup and tighten securely. See Fig 1.


6. Insert the stripped ends of the light kit's wires into the fan's light kit terminal block. White from the light kit to White from the fan. Black from the light kit to Blue from the fan. Tighten the set screws against the wire ends using the included screwdriver.

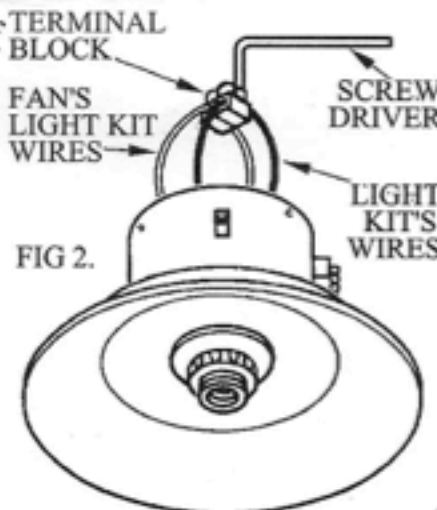


7. Re-connect the switch cup's wire connector to the fan's wire connector (they are color-coded and notched to fit one way.)

8. Re-attach the switch cup to the fan using the three screws removed earlier.


9. Remove the Glass Retainer from the light body by unscrewing it counterclockwise. See Fig 3.

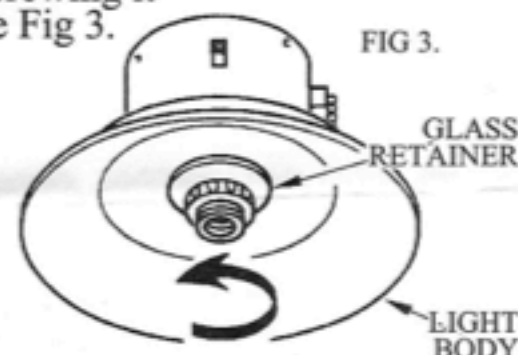


10. Lift the Glass Shade in place and screw the Glass Retainer back onto the Threaded Bulb Holder clockwise. See Fig 4.

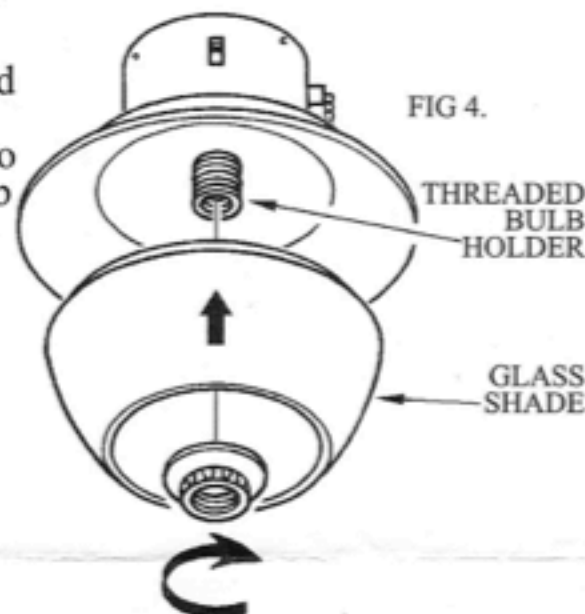

11. Install the Bulb into the Threaded Bulb Holder inside the Glass Shade. See Fig 5.

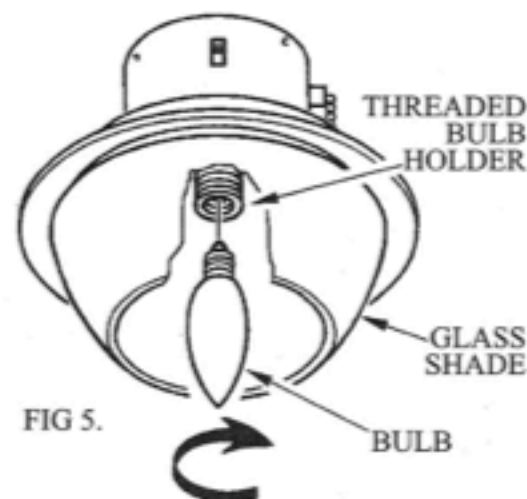

12. Install the Pull Chain Knob to the Pull Chain Connector. See Fig 6.

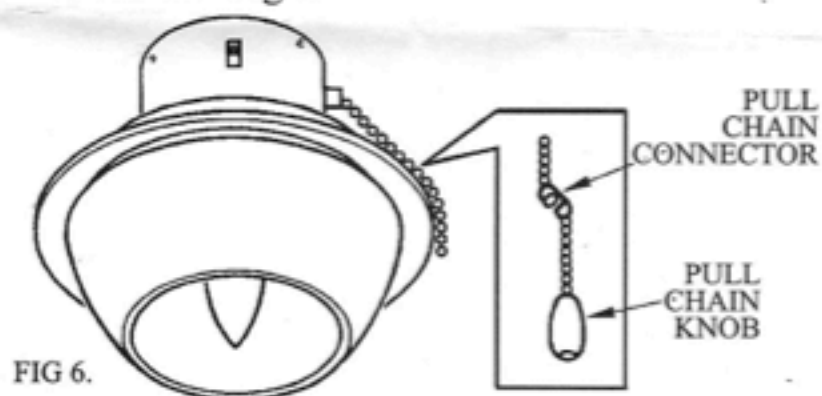

Turn the power back on and you are done!