


Owner's Manual



#155

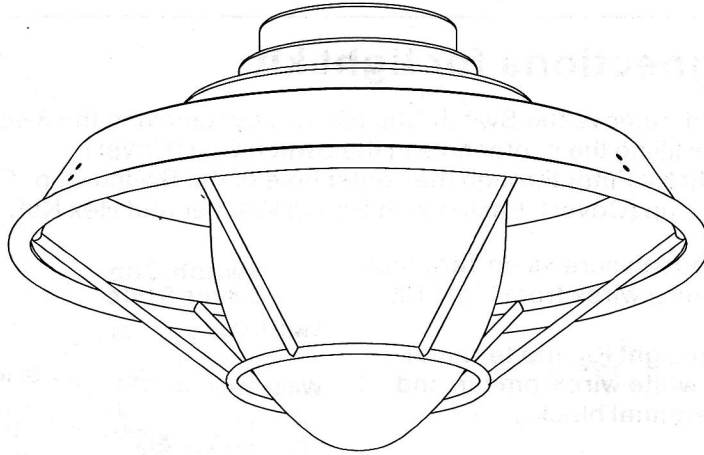

Net weight

1.9 KGS.

4.18 LBS.



WARNING : Read and follow these instructions carefully and be mindful of all warnings shown throughout.

CAUTION: Risk of Electrical Shock. Be sure that all electrical power is off before installing, removing or servicing the light fixture.

To AVOID possible ELECTRIC SHOCK, be sure that ELECTRICITY IS TURNED OFF AT THE MAIN POWER BOX BEFORE WIRING.

All kits must be used only with ceiling fans. Do not install as a lighting fixture attached to a building structure.

All electrical connections must be in accordance with local codes, ordinances or national electrical codes. If you are unfamiliar with methods of installing electrical wiring – secure the services of a qualified electrician. Before starting installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning power off using the fan switch (speed control on/off) is not sufficient to prevent electrical shock.

NOTE: The important safeguards and instructions in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the unit.


1. Make wire connections for light kit

If fan is already assembled, remove the Switch Cup (Cover) by removing the 3 screws around cup. Remove the Center Screw filling the center hole in the Switch Cup (Cover). Insert the wires of the Light Kit Fitter through the center hole of the Switch Cup (Cover) and thread the fixture into the Switch Cup (Cover). Fasten with Spring Washer and Hex Nut.


Terminal Block Style -- Loosen screws on Terminal Block first, for accepting new wires from Light Kit.

- (1). Insert white wire from Light Kit into terminal block extending from white wire from fan and tighten by screw on terminal block.
- (2). Insert black wire from Light Kit into terminal block extending from blue wire from fan and tighten by screw on terminal block.


Attach Light Kit and Switch Cup (Cover) assembly to Switch Cup (Plate) and secure with three original screws.

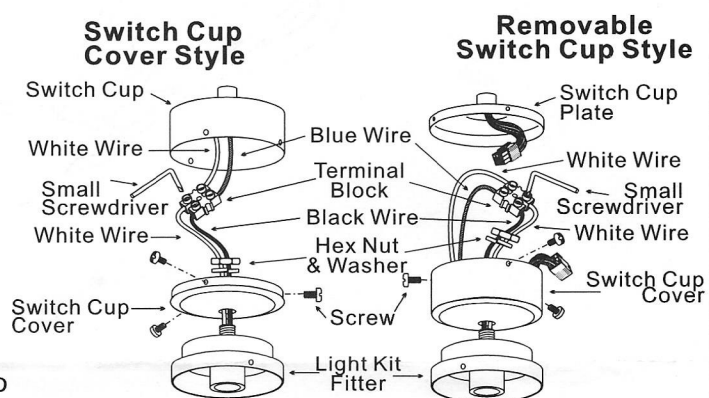


2. Light kit installation

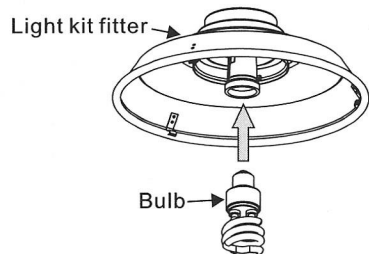

- (1). Install bulb (bulb included) to lamp holder on light fixture.

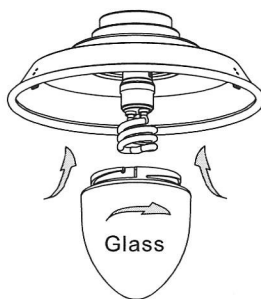

- (2). Attach & rotate glass shade clockwise to light kit pan.

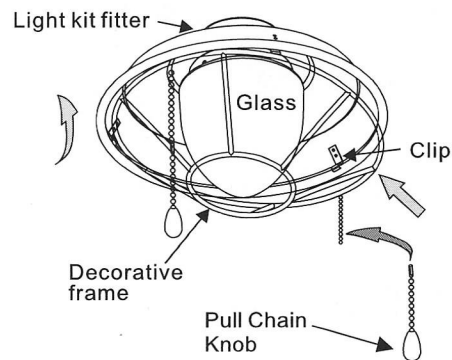

- (3). Attach the decorative frame to two of the three clips first, then evenly press the decorative frame to the third clip until the frame is engaged in all the three clips tightly.

Connect pull chain knob to pull chain.